


Zdjęcia do oferty likwidacyjnej 308000-CWL.752.4.168.2025





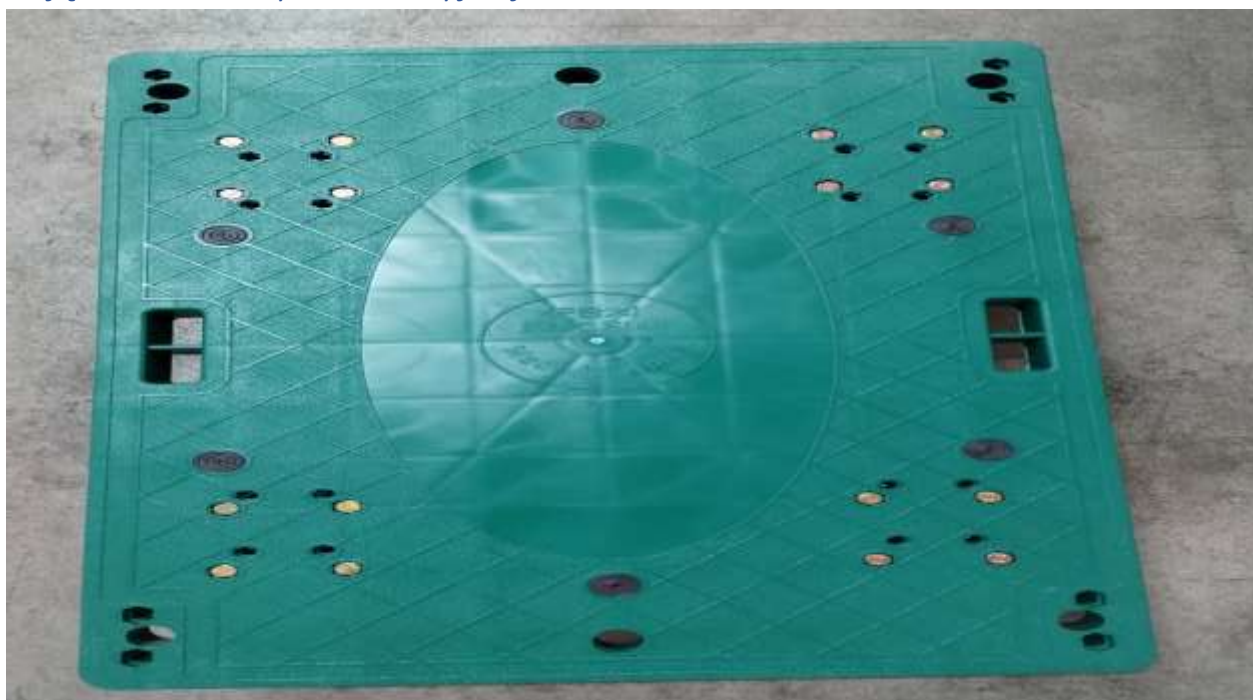

Note:

1. The truck shall be used, serviced and repaired according to the manufacturer's requirements.
2. The truck shall not be modified or have attachments fitted without ensuring that the truck is still safe.

1. Applicable Range

- 1.1 Hand pallet truck is a low lift transportation tool which is limited to move palletized cargo, reliability, etc.
- 1.2 The working place must be non-slip, hard and flat ground without holes or obstacles.
- 1.3 The ambient lighting is 50 lux at least.
- 1.4 Turning radius is 1265-1355mm

2. Main parameter

Load capacity	kg	2500
Lift height	mm	200/190
Unloaded height	mm	169/75
Height of handleless	mm	431.5/421.5
Fork length	mm	1100/1150/1220
Overall width	mm	520/550/660
Steering wheel	mm	Ø160/Ø180
Fork wheel	mm	Ø70
Weight	kg	60-77

3. Assembly of hand pallet truck

- 3.1 Put out the pin roll 23, see figure 1



Fig.1



Fig.2

- 3.2 Insert the handle B into A, connect the handle B and pump body 31 with pin roll 23.
- 3.3 Cross the spring pin 24 to pin roll 23 and fixed.

- 3.4 Cross the handle's chain to the central hole of pin roll 23, see figure 2.



Fig.3



Fig.4